



# Soil Mechanics Series - Description and Classification

An Online Continuing Education Course for Engineers

**Course Number: G-3002**

**Credit: 3 Hours / 3 PDH / 3 CPD**

# Soil Mechanics Series: Description and Classification

## Introduction

The geotechnical specialist is usually concerned with the design and construction of some type of geotechnical feature constructed on or out of a geomaterial. For engineering purposes, in the context of this course, the geomaterial is considered to be primarily rock and soil. A geomaterial intermediate between soil and rock is labeled as an intermediate geomaterial (IGM). These three classes of geomaterials are described as follows:

- **Rock** is a relatively hard, naturally formed solid mass consisting of various minerals and whose formation is due to any number of physical and chemical processes. The rock mass is generally so large and so hard that relatively great effort (e.g., blasting or heavy crushing forces) is required to break it down into smaller particles.
- **Soil** is defined as a conglomeration consisting of a wide range of relatively smaller particles derived from a parent rock through mechanical weathering processes that include air and/or water abrasion, freeze-thaw cycles, temperature changes, plant and animal activity and by chemical weathering processes that include oxidation and carbonation. The soil mass may contain air, water, and/or organic materials derived from decay of vegetation, etc. The density or consistency of the soil mass can range from very dense or hard to loose or very soft.
- **Intermediate geomaterials (IGMs)** are transition materials between soils and rocks. The distinction of IGMs from soils or rocks for geotechnical engineering purposes is made purely on the basis of strength of the geomaterials. Discussions and special design considerations of IGMs are beyond the scope of this course.

The following three terms are often used by geotechnical specialists to describe a geomaterial: **identification, description** and **classification**. For soils, these terms have the following meaning:

- **Identification** is the process of determining which components exist in a particular soil sample, i.e., gravel, sand, silt, clay, etc.
- **Description** is the process of estimating the relative percentage of each component to prepare a word picture of the sample (ASTM D 2488). Identification and description are accomplished primarily by both a visual examination and the feel of the sample, particularly when water is added to the sample. Description is usually performed in the field and may be reevaluated by experienced personnel in the laboratory.

- **Classification** is the laboratory-based process of grouping soils with similar engineering characteristics into categories. For example, the Unified Soil Classification System, USCS, (ASTM D 2487), which is the most commonly used system in geotechnical work, is based on grain size, gradation, and plasticity. The AASHTO system (M 145), which is commonly used for highway projects, groups soils into categories having similar load carrying capacity and service characteristics for pavement subgrade design.

It may be noted from the above definitions that the description of a geomaterial necessarily includes its identification. Therefore, as used in this course, the term “description” is meant to include “identification.”

The important distinction between classification and description is that standard AASHTO or ASTM laboratory tests must be performed to determine the classification. It is often unnecessary to perform the laboratory tests to classify every sample. Instead soil technicians are trained to identify and describe soil samples to an accuracy that is acceptable for design and construction purposes. ASTM D 2488 is used for guidance in such visual and tactile identification and description procedures. These visual/tactile methods provide the basis for a preliminary classification of the soil according to the USCS and AASHTO system.

During progression of a boring, the field personnel should describe only the soils encountered. Group symbols associated with classification should not be used in the field. It is important to send the soil samples to a laboratory for accurate visual description and classification by a laboratory technician experienced in soils work, as this assessment will provide the basis for later testing and soil profile development. Classification tests can be performed in the laboratory on representative samples to verify the description and assign appropriate group symbols based on a soil classification system (e.g., USCS). If possible, the moisture content of every sample should be determined since it is potentially a good indicator of performance. The test to determine the moisture content is simple and inexpensive to perform.

## 1.0 SOIL DESCRIPTION

Soil description/identification is the systematic naming of individual soils in both written and spoken forms (ASTM D 2488, AASHTO M 145). Soil classification is the grouping of soils with similar engineering properties into a category by using the results of laboratory-based index tests, e.g., group name and symbol (ASTM D 2487, AASHTO M 145). It is important to distinguish between a visual description of a soil and its classification in order to minimize potential conflicts between general visual evaluations of soil samples in the field and more precise laboratory evaluations supported by index tests.

The soil's description should include as a **minimum**:

- Apparent consistency (e.g., soft, firm, etc. for fine-grained soils) or density adjective (e.g., loose, dense, etc. for coarse-grained soils);

- Water content condition adjective (e.g., dry, moist, wet);
- Color description (e.g., brown, gray, etc.);
- Main soil type name, often presented in all capital letters (e.g. SAND, CLAY);
- Descriptive adjective for main soil type (e.g., fine, medium, coarse, well-rounded, angular, etc. for coarse-grained soils; organic, inorganic, compressible, laminated, etc., for fine-grained soils);
- Particle-size distribution adjective for gravel and sand (e.g., uniform, well-graded, gap-graded);
- Plasticity adjective (e.g., high, low) and soil texture (e.g., rough, smooth, slick, waxy, etc.) for inorganic and organic silts or clays;
- Descriptive term for minor type(s) of soil (with, some, trace, etc.);
- Minor soil type name with "y" added if the fine-grained minor component is less than 30 percent but greater than 12 percent or the coarse-grained minor component is 30 percent or more (e.g., silty for fine grained minor soil type, sandy for coarse-grained minor soil type);
- Descriptive adjective “with” if the fine-grained minor soil type is 5 to 12 percent (e.g., with clay) or if the coarse-grained minor soil type is less than 30 percent but 15 percent or more (e.g., with gravel). Note: some practices use the descriptive adjectives “some” and “trace” for minor components;
- Inclusions (e.g., concretions, cementation);
- Geological name (e.g., Holocene, Eocene, Pleistocene, Cretaceous), if known, in parenthesis or in notes column.

The various elements of the soil description are generally stated in the order given above. For example, a soil description might be presented as follows:

*Fine-grained soils:* Soft, wet, gray, high plasticity CLAY, with f. Sand; (Alluvium)

*Coarse-grained soils:* Dense, moist, brown, silty m-f SAND, with f. Gravel to c. Sand; (Alluvium)

When minor changes occur within the same soil layer (e.g., a change in apparent density), the boring log should indicate a description of the change, such as “same, except very dense.”

### **1.1 Consistency and Apparent Density**

The consistency of fine-grained soils and apparent density of coarse-grained soils can be estimated from the energy-corrected SPT N-value,  $N_{60}$ . The consistency of clays and silts varies from very soft to firm to stiff to hard. The apparent density of coarse-grained soil ranges from very loose to dense to very dense. Suggested guidelines for estimating the in-place apparent density or consistency of soils are given in Tables 1 and 2, respectively.

**Table 1****Evaluation of the apparent density of coarse-grained soils (after Peck, *et al.*, 1974)**

$N_{60}$	Apparent Density	Relative Density, %
0 – 4	Very loose	0 – 20
>4 - 10	Loose	20 – 40
>10 - 30	Medium dense	40 – 70
>30 - 50	Dense	70 – 85
>50	Very Dense	85 – 100

The above guidance may be misleading in gravelly soils.

**Table 2****Evaluation of the consistency of fine-grained soils (after Peck, *et al.*, 1974)**

$N_{60}$	Consistency	Unconfined Compressive Strength, $q_u$ , ksf (kPa)	Results of Manual Manipulation
<2	Very soft	< 0.5 (<25)	Specimen (height = twice the diameter) sags under its own weight; extrudes between fingers when squeezed.
2 - 4	Soft	0.5 – 1 (25 – 50)	Specimen can be pinched in two between the thumb and forefinger; remolded by light finger pressure.
4 - 8	Medium stiff	1 – 2 (50 – 100)	Can be imprinted easily with fingers; remolded by strong finger pressure.
8 - 15	Stiff	2 – 4 (100 – 200)	Can be imprinted with considerable pressure from fingers or indented by thumbnail.
15 - 30	Very stiff	4 – 8 (200 – 400)	Can barely be imprinted by pressure from fingers or indented by thumbnail.
>30	Hard	> 8 >400	Cannot be imprinted by fingers or difficult to indent by thumbnail.

Note that  $N_{60}$ -values should not be used to determine the design strength of fine grained soils.

The apparent density or consistency of the soil formation can vary from these empirical correlations for a variety of reasons. Judgment remains an important part of the visual identification process. Field index tests (e.g., smear test, dried strength test, thread test) which will be described in the next section are suggested as aids in estimating the consistency of fine grained soils.


In some cases the sampler may pass from one layer into another of markedly different properties; for example, from a dense sand into a soft clay. In attempting to identify apparent density, an assessment should be made as to what part of the blow count corresponds to each layer since the sampler begins to reflect the resistance of the next layer before it actually reaches it.

### 1.2 Water Content

The relative amount of water in a soil is described by an adjective such as dry, moist, or wet.

**Table 3**  
**Adjectives to describe soil moisture**

Description	Characteristics
Dry	No signs of moisture
Moist	Signs of moisture
Wet	Signs when soil exhibits some free water

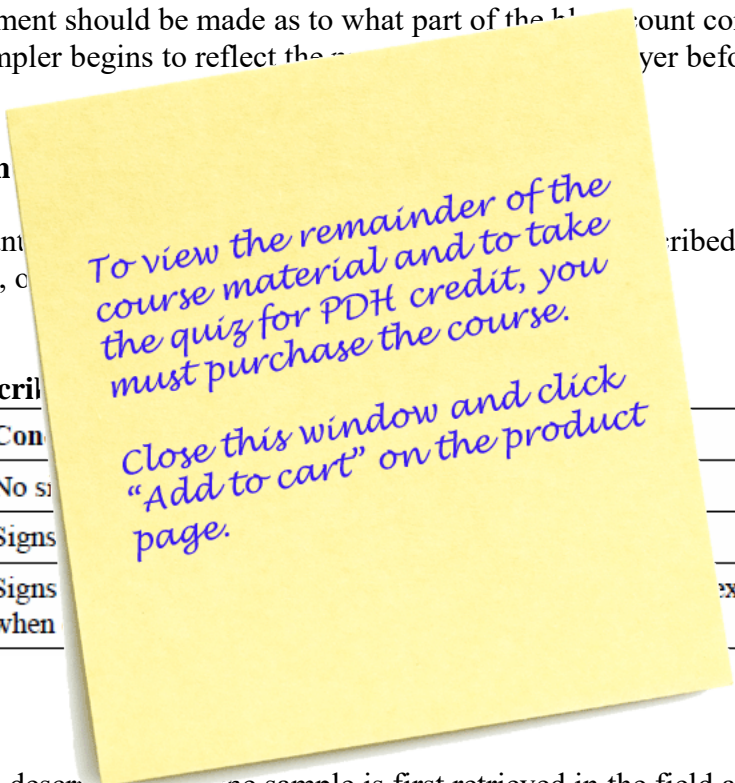

### 1.3 Color

The color must be described when the sample is first retrieved in the field at the as-sampled water content since the color may change with changes in the water content. Primary colors should be used (brown, gray, black, green, white, yellow, red). Soils with different shades or tints of basic colors are described by using two basic colors; e.g., gray-green. Some agencies may require use of the Munsell color system (USDA, 1993). When the soil is marked with spots of color, the term “mottled” can be applied. Soils with a homogeneous texture but having color patterns that change and are not considered mottled can be described as “streaked.”

### 1.4 Type of Soil

The constituent parts of a given soil type are defined on the basis of texture in accordance with particle-size designators separating the soil into coarse-grained, fine-grained, and highly organic designations. Soil with more than 50 percent by weight of the particles larger than the U.S. Standard No. 200 sieve (0.075 mm) is designated coarse-grained. Soil (inorganic